

RCAC25DD4 Series Pulse Jet Valves

Description

High performance diaphragm valve with dresser nut ports. Equipped with 'Shockwave' springless diaphragm, the 4 series valves are available as remote pilot valves and may be converted to integral pilot using a screw in PV pilot. Outlet is at 90° to inlet.

Suitable for

Dust collector applications, in particular for reverse pulse jet filter cleaning and its variations including bag filters, cartridge filters and envelope filters.

Construction

Body and Dresser
Nuts: Aluminium (diecast)
Screws: 302 Stainless Steel
Dresser Nut Seals: Nitrile or Viton
Diaphragm: High performance engineering thermoplastic elastomer.

Operation

Recommended on time range: 50-500ms
Recommended time between pulses: 1 minute or greater

Maintenance

Diaphragm and pilot inspection should be conducted annually.

Approvals

The RCAC25DD4 meets the requirements of the European Electromagnetic Compatibility (EMC). Directive 2004/108/EC and Low Voltage Directive 2006/95/EC, when fitted with the PV pilot.

Please Note: Pipes must be to Schedule 40 outside diameter.


Schedule 40 Size	OD mm	OD Inches
1"	33.4	1.315

Weights

Valve	Kg (lbs)
RCAC25DD4	0.96 (2.12)

Dimensions

(Dimensions in mm and [inches])

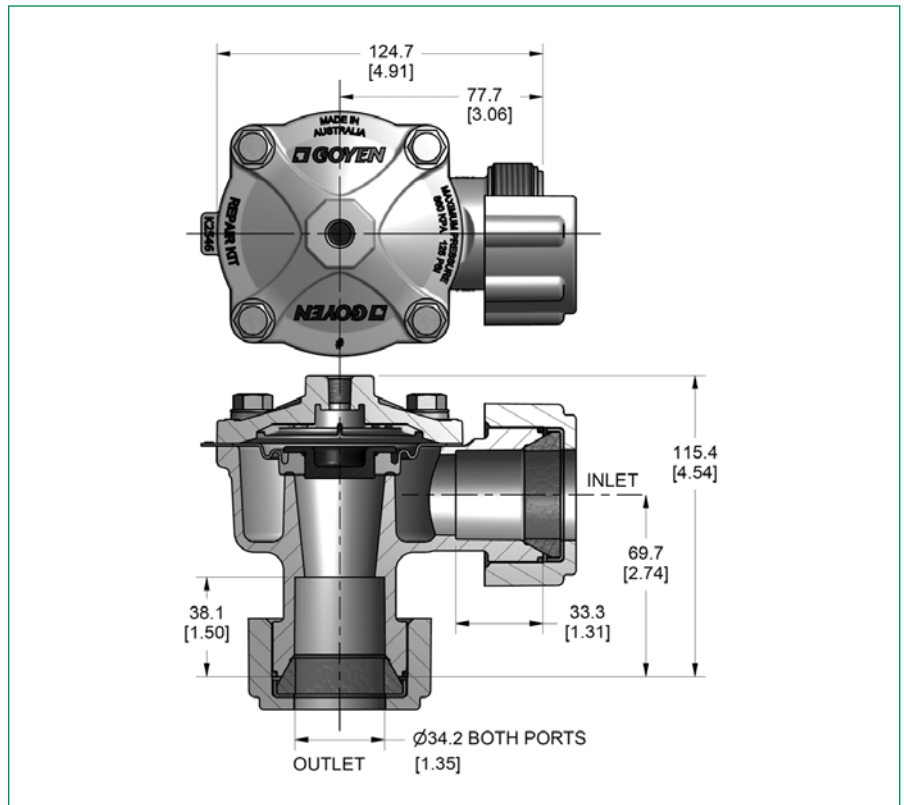

Maintenance Kits

Model	Nitrile	Shockwave	Viton
Diaphragm Kit RCAC25DD4	NA	K2546	K2551
Dresser Seal Kit CA/RCA25DD	K2508	NA	K2507

Product Characteristics and Performance

Port Size mm (in)	No. of Diaph.	Flow Kv (Cv)	Pressure Range kPA(Psi)	Temperature Range °C (°F)	
				Shockwave	Viton Seals
25 (1)	1	22.5 (26.0)	30(5) – 860(125)	-40(-40) – 82(179.6)	-29(-20.2) – 232(449.6)

Order Code

RCAC 25DD4				
		Diaphragm material	1=Viton 2=Shockwave	
		Thread type	0=NPT, 1=RC, 2=G	
		Pilot size	0=1/8", 1=1/4"	

Examples: RCAC25DD4012

1" dresser nut valve with 1/8" pilot, 1" RC port threads, Shockwave diaphragm.

Note:

1/8 Pilot available in NPT & RC Thread

1/4 Pilot is only available in G Thread



Australia

Head Office
Goyen Controls Co Pty Ltd
268 Milperra Road
Milperra, NSW 2214

Telephone: 1800 805 372
Facsimile: 1300 658 799

Queensland

Telephone: 1800 805 372
Facsimile: 1300 658 799

Victoria

Telephone: 1800 805 372
Facsimile: 1300 658 799

South Australia

Telephone: 1800 805 372
Facsimile: 1300 658 799

Western Australia

Telephone: 1800 805 372
Facsimile: 1300 658 799

Asia

Goyen Controls Co Pty Ltd
Shanghai Representative Office
1209 Greenland Business Centre
1258 Yu Yuan Road
Shanghai PC200050
CHINA

Telephone: +86 21 5239 8810
Facsimile: +86 21 5239 8812

Goyen Controls Co Pty Ltd
73-M Jalan Mega Mendung
Kompleks Bandar OUG
58200 Kuala Lumpur MALAYSIA

Telephone: +60 37 987 6839
Facsimile: +60 37 987 7839

Office: Singapore
Tel/Facsimile: +65 6457 4549

USA

Goyen Valve Corporation
1195 Airport Road
Lakewood
New Jersey 08701
USA

Telephone: +1 732 364 7800
Facsimile: +1 732 364 1356

Europe

Goyen Controls Co UK Ltd
Unit 3B Beechwood
Chineham Business Park
Basingstoke, Hampshire, RG24 8WA
UNITED KINGDOM

Telephone: +44 1256 817 800
Facsimile: +44 1256 843 164

Tyco Umwelttechnik GmbH
Im Petersfeld 6
D-65624 Altdiez
GERMANY

Telephone: +49 6432 95299 0
Facsimile: +49 6432 95299 24

Mecair S.r.l.
Via per Cinisello 97
20054 Nova Milanese
Milano,
ITALY

Telephone: +39 0362 3751
Facsimile: +39 0362 367279

www.cleanairsystems.com